

IPmux-1E

TDMoIP Gateway

DESCRIPTION

- IPmux-1E is a TDMoIP gateway for transporting E1/T1, ISDN BRI, and FXS/FXO/E&M services over IP and Ethernet-based networks. IPmux-1E converts the data stream from the user ports to packets for transmission over the packet-switched network. The addressing scheme of these packets is IP. These packets are transmitted via the IPmux-1E Ethernet port to the network. A remote TDMoIP device converts the IP packets back to TDM traffic.
- A powerful internal Layer-2 Ethernet switch provides a user Ethernet port with rate limiting and port-based VLAN tagging capabilities.
- The device supports standard IP features, such as ICMP (ping), ARP, next hop and default gateway.
- *Figure 1* shows a point-to-point application extending analog phone service to a remote PBX, and providing LAN-to-LAN communication over a shared fiber optic or UTP cable.
- *Figure 2* shows a multi-tenant office building where a variety of legacy TDM services (ISDN, E1/T1, and analog phones) are provided by IPmux-1E units connected to IPmux-16 and Megaplex-2100 with ML-IP via the packet-switched network.

PERFORMANCE

- IPmux-1E achieves end-to-end processing delay as low as 3 msec, using high-performance buffering and forwarding techniques.
- Configurable packet size allows to achieve proper balance between PSN throughput and delay.
- An enhanced buffering mechanism compensates for network packet delay variation (jitter) of up to 300 msec.
- An optional internal echo canceller improves voice quality when a large end-to-end delay exists on the TDMoIP link.

QoS SUPPORT

- VLAN tagging and priority labeling are supported according to 802.1p&Q. TDMoIP frames are assigned (tagged) a dedicated VLAN ID.
- VLAN membership allows:
 - Management traffic to be run over a dedicated VLAN
 - User data traffic to be filtered according to a set of up to 15 VLANs.

- The user can configure the ToS or Diffserv of the outgoing TDMoIP packets. This allows the TDMoIP packets to be given a higher priority by network switches and routers.
- Assigned, IANA-registered UDP socket number for TDMoIP simplifies flow classification through switches and routers.
- Rate limiting can be applied on the Ethernet user port to control the maximum rate of the traffic transmitted towards the IP/Ethernet network.

TIMING

- Synchronization between TDM devices is maintained by using advanced clock distribution mechanisms. The clocking options are:
 - **Internal** – the master clock source for the TDM circuit is provided by the IPmux-1E internal clock oscillator
 - **Loopback** – the transmit clock is derived from the E1/T1 port receive clock
 - **Adaptive** – the clock is recovered from the Ethernet network interface
 - **External** – an external clock source is used to synchronize the units with E1 or T1 user interfaces via their station clock ports.
- The external clock port provides out-of-band synchronization.

APPLICATIONS

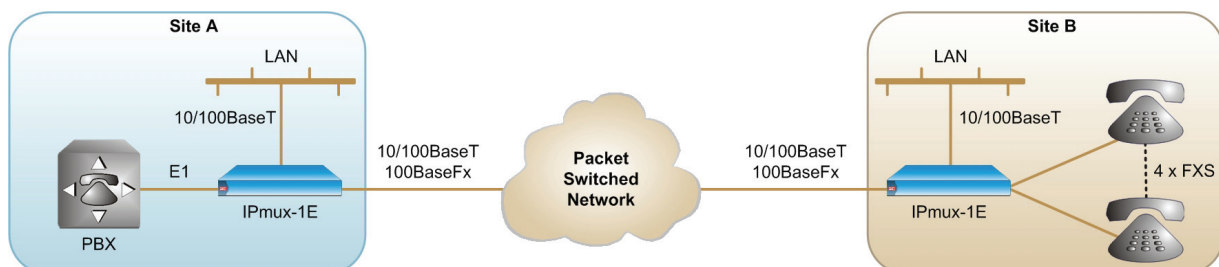


Figure 1. Voice and Data Integration over an Ethernet Link

ETHERNET PORTS

- IPmux-1E supports the following Ethernet ports:
 - One network port (copper or fiber optic)
 - One user port (copper).

E1 OR T1 PORT

- One E1 or T1 port for connectivity to any standard E1 or T1 device.
- E1 and T1 interfaces support the following:
 - Integral LTU/CSU for line protection and long haul applications
 - G.703 unframed and G.704 framed modes
 - CAS
 - CRC-4 bit generation (E1).
- An internal 16-msec echo canceller for the E1 and T1 ports is available.

ISDN BRI S0 PORTS

- Four standard ISDN basic rate S0 ports provide connectivity to any Network Termination (NT) or Terminal Equipment (TE) ISDN device.
- The phantom feeding function enables IPmux-1E to power the remote user equipment (NT mode).
- Each S0 port supports remote and local digital loopback test modes.

ANALOG PORTS

- IPmux-1E offers four FXS, FXO, or E&M analog ports.
- An internal 16-msec echo canceller for the analog ports is available.

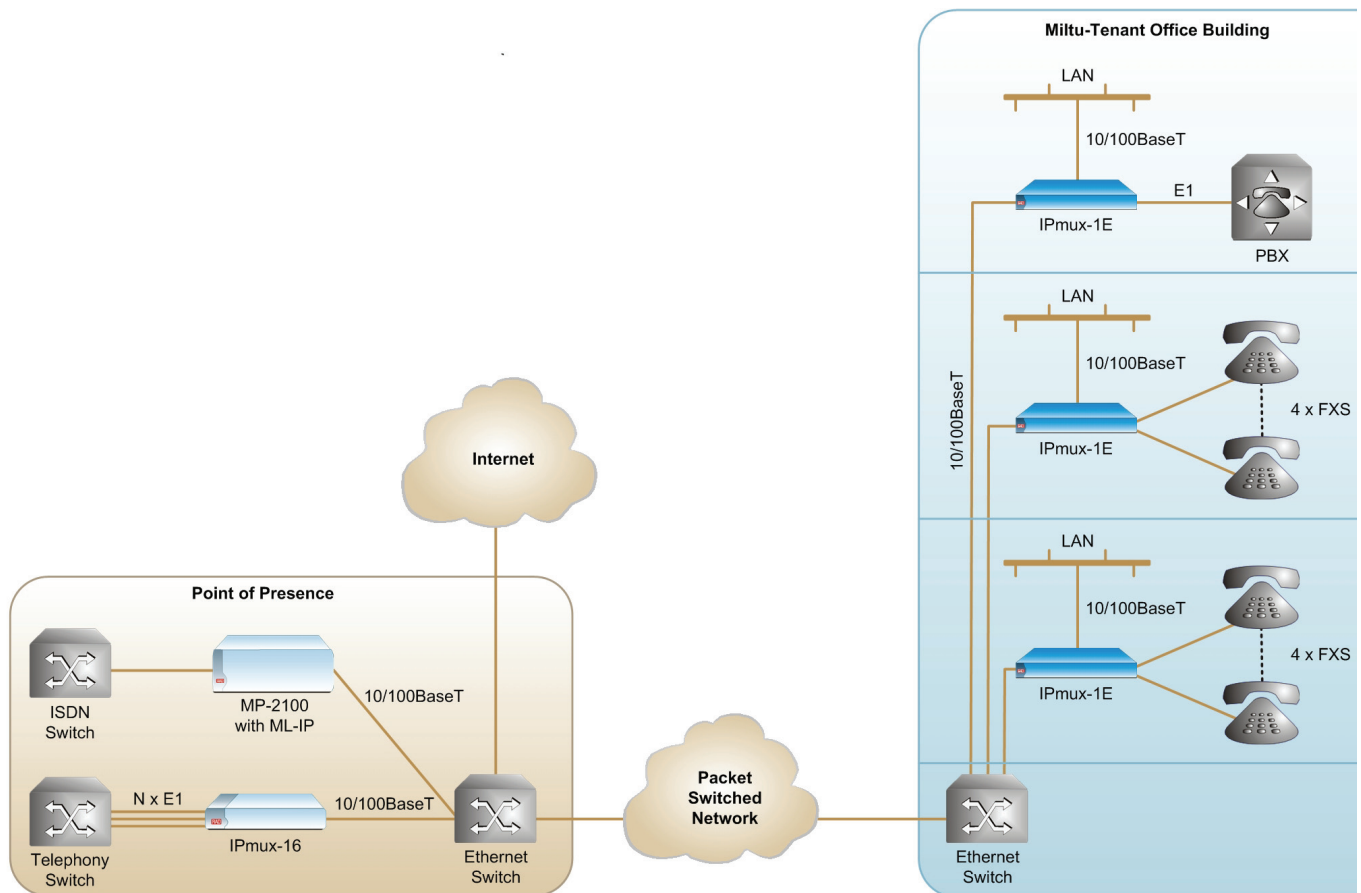


Figure 2. Integrated Ethernet-Based Voice and Data Access for Multi-Tenant Building

DIAGNOSTICS

- External and internal loopbacks can be used to check the TDM links connectivity.
- The following physical layer alarms are supported:
 - E1/T1 LOS, AIS, LOF, LCV
 - ISDN S0 LOF
 - FXS/FXO/E&M port status.
- IPmux-1E provides end-to-end alarm generation and end-to-end AIS indication. When a local E1 or T1 port receives AIS, it is passed to the remote port via the Ethernet/IP network. If a local Ethernet port is not connected, AIS indication is generated both in the local and the remote devices.

- An internal built-in test (BIT) is performed after power-up. The results of the test are visible via the local terminal.
- IPmux-1E monitors LAN and IP layer network condition statistics, such as packet loss and packet delay variation (jitter). The events are stored in log files.

MANAGEMENT

- Configuration and monitoring are performed locally via an ASCII terminal, or remotely via Telnet, or RADview.
- Software download is supported via the local terminal, using XMODEM, or remotely, using TFTP. After downloading a new software version, IPmux-1E automatically saves the previous version in non-volatile memory for backup. Similarly, copies of the configuration file can be downloaded and uploaded to a remote workstation for backup and restore purposes.

- RADview Service Center TDMoIP network management application provides TDMoIP service and manages the TDMoIP devices via a user-friendly graphical interface that allows monitoring and configuring multiple IPmux devices. Fault isolation, statistics and event gathering are available. The intuitive GUI, "point-and-click" functionality and easy-to-follow wizards increase the efficiency and accuracy of the service provisioning process.

Table 1. Fiber Optic Interface Characteristics

Interface Type	Wavelength [nm]	Optical Power		Receive Sensitivity [dBm]	Optical Budget [dB]*	Loss	
		Min [dBm]	Max			Min [dB/km]	Max
Multimode	1310	-19	-14	-32	10*	1	4
Single mode	1310	-15	-8	-32	14*	0.5	0.8

* Permitted fiber optic cable length differs according to fiber characteristics, splices, and connectors.



SPECIFICATIONS

E1 INTERFACE

- **Standards**
ITU-T Rec. G.703, G.704, G.706, G.732, G.823
- **Framing**
 - Unframed
 - CRC-4 with or without MF
 - CAS with or without MF
- **Data Rate**
2.048 Mbps
- **Line Code**
HDB3
- **Receive Level**
0 to -28 dB with LTU
0 to -9 dB without LTU
- **Transmit Level**
±3V ±10%, balanced
±2.37V ±10%, unbalanced
- **Connector**
 - Balanced: RJ-45
 - Unbalanced: RJ-45 (RJ-45 to BNC adapter cable is supplied)
- **Line Impedance**
120Ω, balanced
75Ω, unbalanced
- **Jitter Performance**
Per ITU-T G.823

T1 INTERFACE

- **Standards**
AT&T TR-62411; ITU-T Rec. G.703, G.704; ANSI T1.403, G.824
- **Data Rate**
1.544 Mbps
- **Line Code**
AMI, B8ZS, B7ZS
- **Framing**
Unframed, SF, ESF
- **Receive Level**
0 dB to -30 dB
- **Transmit Level**
±2.75V ±10% at 0 to 655 ft with DSU
0 dB, -7.5 dB, -15 dB, -22.5 dB with CSU
- **Connector**
RJ-45
- **Line Impedance**
100Ω, balanced
- **Jitter Performance**
Per AT&T TR-62411, ITU-T G.824

ETHERNET INTERFACE

- **UTP**
 - Standards: IEEE 802.3, 802.3u, 802.1p&Q
 - Data rate: 10 or 100 Mbps, half/full-duplex
 - Range: up to 100m (328 ft) on UTP Cat.5 cable
 - Connector: RJ-45
- **Fiber Optic (network port only)**
 - Characteristics: see *Table 1*
 - Connector: SC or LC

CONTROL INTERFACE

- **Interface**
RS-232/V.24 (DCE)
- **Data Rate**
9.6, 19.2, 38.4 or 57.6 kbps
- **Connector**
DB-9, female

ISDN S0 INTERFACE

- **Compliance**
ETS 300012, I.430, NTT, 5ESS, DMS-100, NI1
- **Bit Rate**
192 kbps
- **Line Coding**
Pseudo-ternary
- **Line Termination**
100Ω ±5%
- **Connector**
RJ-45

ANALOG INTERFACES

- **Type**
FXS, FXO, and E&M
- **Modulation Method**
PCM (per ITU-T G.711 and AT&T PUB-43801), μ-Law or A-Law
- **Interface**
Loop start for direct connection to a 2-wire telephone
- **Diagnostics**
 - Remote analog loopback
 - 1-kHz tone injection
 - Activity status
- **Connectors**
 - FXS and FXO: RJ-11
 - E&M: RJ-45

GENERAL

- **Timing**
E1/T1:
 - Internal (from internal oscillator)
 - External (E1 or T1, via dedicated port)
 - Loopback (derived from the E1/T1 receive line)
 - Adaptive (regenerated from Ethernet link)
- **PCM:**
 - Internal (from internal oscillator)
 - Loopback (derived from Channel 1 for the unit with ISDN/TE, FXS, FXO and E&M interfaces)
 - Adaptive (regenerated from the Ethernet link)
- **Power**
AC: 100 to 240 VAC, 50/60 Hz
DC: -48 VDC only
- **Power Consumption**
25W or 32W (with Ethernet switch)
- **Physical**
Height: 44 mm (1.7 in)
Width: 432 mm (17.0 in)
Depth: 246 mm (9.7 in)
Weight: 2.3 kg (5.1 lb)
- **Environment**
Temperature: 0–50°C (32–122°F)
Humidity: Up to 90%, non-condensing

